

DLW-LED-029



A



B



C



Die casting heatsink



Anti-glare board




Clear Injection
PC diffuser




Opal PMMA diffuser




Die casting reflector

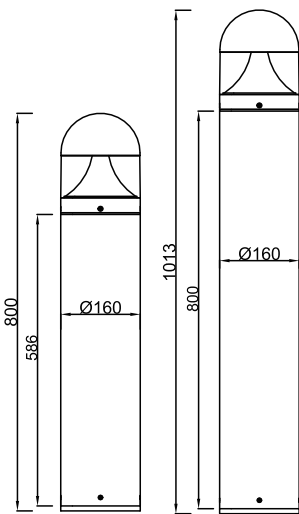


A

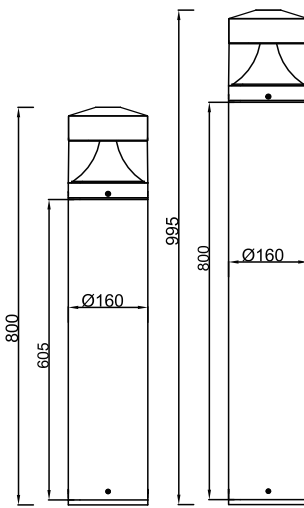

B

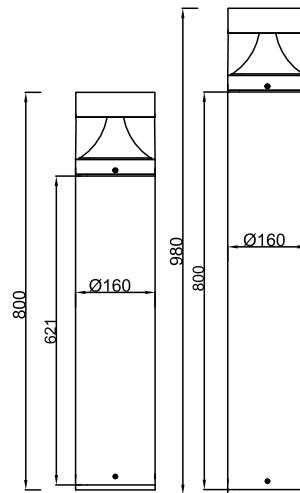

C



Application:



Walkways



Parks and Gardens



Car parks



Prestigious




Retail



Amenity

Distribution:

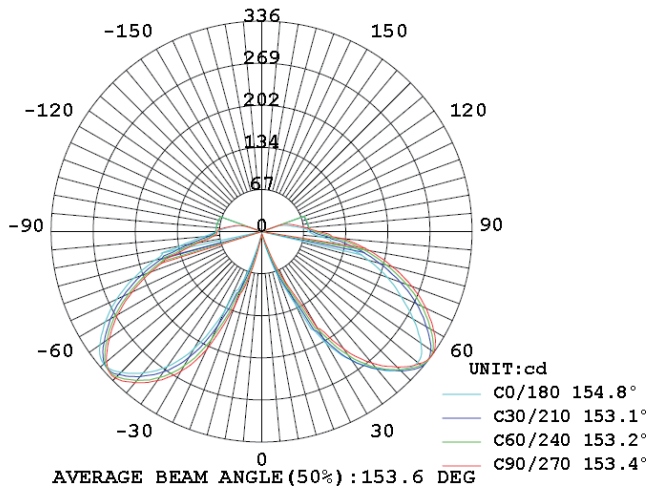

Features:

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy.
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance.
- With anti-glare plate
- Lumileds 2835/3030 led chip and Tridonic driver as regular,Sosen,Meanwell,Osram,driver options.
- Easy access to LED and driver via a removable head.
- 2700-6500K color temperature options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying,regular color:Black,Silver,RAL7043,RAL7016
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.
- Warranty is 3-5 years.

Specification:

| Item No. | LED | Lumens | Wattage | CCT | CRI |
|-----------------|---------------|--------|---------|------------|-------|
| DLW-LED-029-10W | Lumileds 2835 | 750LM | 10W | 2700-6500K | Ra≥80 |
| DLW-LED-029-14W | Lumileds 2835 | 1055LM | 14W | 2700-6500K | Ra≥80 |
| DLW-LED-029-20W | Lumileds 2835 | 1463LM | 20W | 2700-6500K | Ra≥80 |
| DLW-LED-029-24W | Lumileds 2835 | 1672LM | 24W | 2700-6500K | Ra≥80 |
| DLW-LED-029-30W | Lumileds 3030 | 2070LM | 30W | 2700-6500K | Ra≥80 |